


QUADRATHERM® Heater Application Guide




Heater Placement For New Houses With Solid Sidewalls*

Maximum 5 PSI for High Pressure or 11" W.C. for Low Pressure at Heater


For houses 400 feet long (122 m) by 40 to 50 feet wide (12.2-15.2 m)

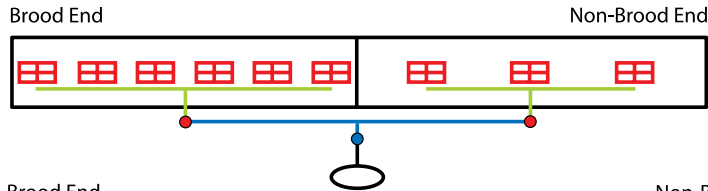

For houses 500 feet long (152.4 m) by 40 to 50 feet wide (12.2-15.2 m)

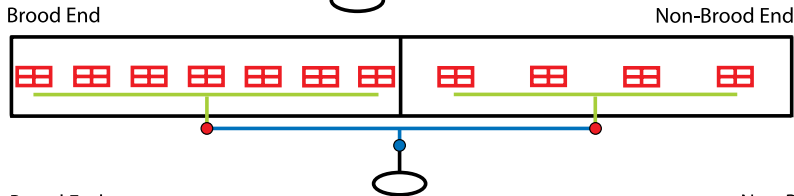

For houses 600 feet long (182.9 m) by 50 to 66 feet wide (15.2-20.1 m)

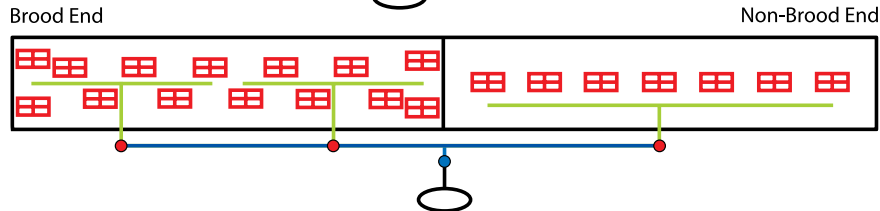

- 5 PSI High Pressure or 11" W.C. Low Pressure
- Secondary regulator must match pressure requirements of heater model
- 10 PSI High Pressure
- First-stage regulator reduces pressure to 10 PSI