

# Radiant Tube Heaters

Direct Infrared Heat for More  
Energy Efficiency and Superior  
Feed Conversion

Now Available in the U.S. and Canada



Let's grow together®



## More Heat Where You Want It

Radiant Tube Heaters from Chore-Time and Heatstar AG\* deliver low-intensity, gentle heat directly toward floor-level objects. These objects, in turn, heat the surrounding air. The tube heaters can be installed high above the floor, where they reflect heat to a large area, reducing cold spots and inconsistent heating.



Count on Chore-Time for  
experience, reliability,  
performance and confidence.

# JET™ Series Radiant Tube Heaters



JET™ Radiant Tube Heaters provide superior heating efficiency, improved bird performance and operational advantages. The JET25™ Model covers 25-60% more floor area directly below the heaters than shorter competitive models.\*\* Additionally, the JET25™ Heater burns at 100,000 BTUs, delivering 25% more output per heater than competitive units burning at 80,000 BTUs.

The result – fewer heaters are needed per house to heat the same area. And, when fewer heaters are needed, other costs also go down. Additionally, whether you choose the JET25™ or the JET20™ Heater, workers can perform in-house maintenance with the side door open, even while the burner is running.

- Heat is transferred efficiently and evenly to the floor, requiring fewer heaters and fewer BTUs per square foot (square meter).
- Aluminized tubing used in the first 10 feet (3.05 meters) of each heater resists corrosion.
- JET™ Heaters dry floor shavings and reduce hot and cold spots.
- Burner is 100% factory-tested.
- Gasket-lined burner box keeps out dust.
- Easy-access hinged panel simplifies maintenance.
- Power and diagnostic lights are positioned under the burner box for easy visibility.
- Connects easily to control systems such as Chore-Time's CHORE-TRONICS® 3 Controller.

\*\* Based on Heatstar AG\* case study, results may vary depending on house conditions.

## Unique JET™ Flame

JET™ Heaters use a burner with a 10-foot (3.05-meter) jet-like flame combined with a unique 25-foot (7.62-meter) or 20-foot (6.10-meter) tube system to provide strong, even heat throughout the poultry house.




With the power of the JET™ Flame, poultry operations may be able to install fewer BTUs per square foot.

## Rapid, Even Heat Transfer

JET™ Series Tube Sets feature a straight-line system with two diameters of tubes that use positive pressure to move and radiate heat evenly along the full length. Warm air is expelled from the end of the tube to fill in the gap between heaters.



Heater	Tube Length	Tube Diameters	
JET25™	25 feet (7.62 m)	3.5 in (89 mm)	4.0 in (102 mm)
JET20™	20 feet (6.10 m)	3.0 in (76 mm)	3.5 in (89 mm)

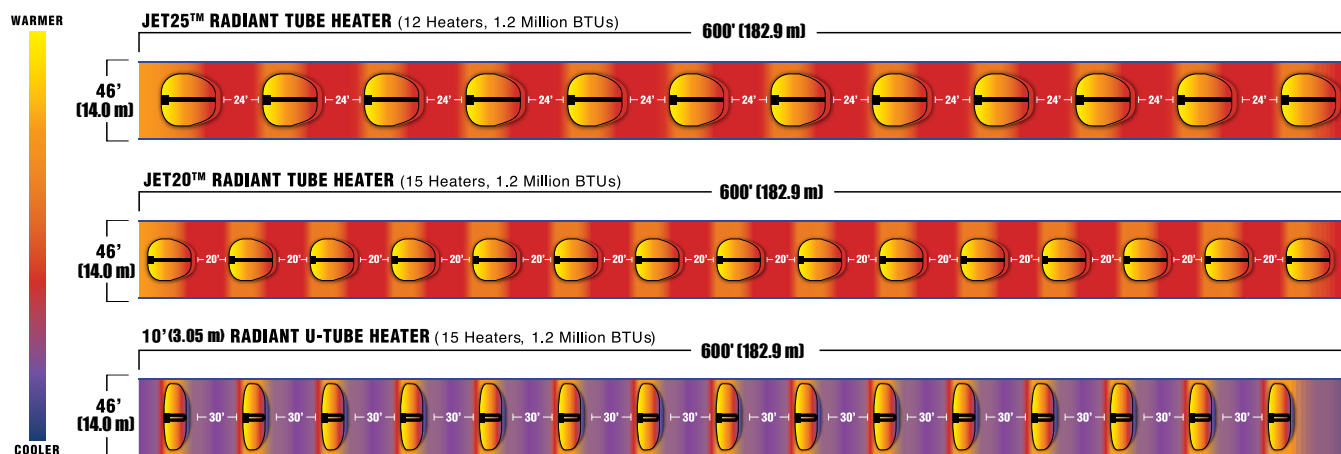

JET™ Heaters provide even heat along the full length of the house. With traditional 40- and 50-foot (12.19- and 15.24-meter) tube heaters, floor temperatures decline rapidly along the tube length, producing arrowhead-shaped floor heat patterns.




Let's grow together®



### Optimized Aluminum Reflector

The aluminum reflector on JET™ Heaters forms a stepped arc using eight different angles to reflect heat from the top of the tube and direct it down to the floor in a wide pattern. A single set of JET™ Heaters installed down the middle of a house can heat up to 50 feet (15.24 meters) in width.

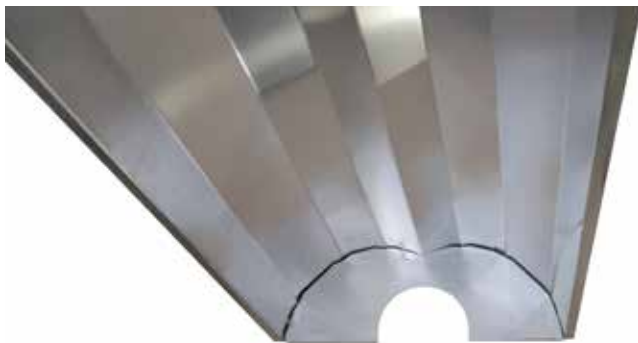

*Eight angles in the reflector direct heat up to 50 feet (15.24 meters) in width.*

### Smaller Cold Spots

With traditional 40-foot (12.19-meter) and 50-foot (15.24-meter) tube heaters, floor temperatures decline rapidly along the tube length, producing arrowhead-shaped floor heat patterns. The result is hot spots near the burner and large cold spots flanking the last tube sections and the gaps between heaters. Chore-Time and Heatstar AG\* solved this limitation with the exclusive design of the JET™ Series Heaters.

### Moving Up the Charts

JET™ Series Heaters have been shown to improve both feed efficiency and bird performance. When changing from a 40- or 50-foot (12.19- or 15.24-meter) traditional tube heater to a JET25™ Tube Heater, some customers improved their feed conversion ratios with the potential to increase their contract bonus payments.

---

## COMFORTER™ Radiant Tube Heaters

For dependable heat at an economical price, you can count on COMFORTER™ Radiant Tube Heaters from Chore-Time and Heatstar AG\*. Our popular 40- and 50-foot (12.19- and 15.24-meter) tube sets allow you to install fewer heaters than traditional round radiant heaters.

- Two-year warranty on tubes; one-year warranty on burner box.\*\*\*
- Sealed burner box for less maintenance.
- Direct spark ignition for reliable operation.

- 10- to 60-foot (3.05- to 18.29-meter) tube lengths.
- Aluminized tubing used in first 10 feet (3.05 meters) to resist corrosion.
- Installation hardware included with tube sets.
- Stainless steel couplers.
- Chrome-plated hanging brackets.
- Connects easily to control systems such as Chore-Time's CHORE-TRONICS® 3 Controller.

\*\*\*See written warranty for complete warranty details.

## JET™ Series Tube Heaters

### JET™ Heater Burner Boxes (Single-Stage)

Item Number	Model Number	Description	Fuel Type
F102080-CT	JET20NG	JET 80,000 BTU/HR (20,173 kcal/hr)	Natural Gas
F102085-CT	JET20LP	JET 80,000 BTU/HR (20,173 kcal/hr)	Liquid Propane
F102090-CT	JET25NG	JET 100,000 BTU/HR (25,216 kcal/hr)	Natural Gas
F102095-CT	JET25LP	JET 100,000 BTU/HR (25,216 kcal/hr)	Liquid Propane

### JET™ Tube Sets (Includes Tubes, Reflectors, Hangers, Couplers, Tube Vent Cap, Drip Line, Flex Gas Supply Line, Chains and Turbulator)

Item Number	Model Number	Description
F106020	JET20TB	20 ft. (6.10 m) Tube Set, 3-3.5 in. (76-89 mm) Diameter
F106025	JET25TB	25 ft. (7.62 m) Tube Set, 3.5-4 in. (89-102 mm) Diameter

### JET™ Accessories (See additional accessories in JET™ & COMFORTER™ Series list below. Custom LP/NG gas hoses and water hoses available.)

#### JET™ Specifications (See additional specifications in JET™ & COMFORTER™ Series list below.)

Electrical – 120 volt-60 Hz; Starting Current – 5.0 amps; Running Current – 1.0 amps

Combustion Chamber / Heat Exchanger

JET 25: 3.5 in. (89 mm) aluminized 16 gauge (1.3 mm) first 10 ft. (3.05 m) – 4 in. (102 mm) hot rolled steel 16 gauge (1.3 mm) last 15 ft. (4.57 m)

JET 20: 3 in. (76 mm) aluminized 16 gauge (1.3 mm) first 10 ft. (3.05 m) – 3.5 in. (89 mm) hot rolled steel 16 gauge (1.3 mm) last 10 ft. (3.05 m)

Flue Connection – Vent Cap (supplied)

**NOTICE: Always check local codes for permitted use. See owner's manual for proper installation and operation.**

## COMFORTER™ Series Tube Heaters

### COMFORTER™ Heater Burner Boxes (Single-Stage)

Item Number	Model Number	BTU/HR (kcal/hr)	Fuel Type
F102654-CT	HSAG 100 N	100,000 (25,216)	Natural Gas
F102655-CT	HSAG 100 LP	100,000 (25,216)	Liquid Propane
F102656-CT	HSAG 125 N	125,000 (31,520)	Natural Gas
F102657-CT	HSAG 125 LP	125,000 (31,520)	Liquid Propane
F102658-CT	HSAG 150 NG	150,000 (37,825)	Natural
F102659-CT	HSAG 150 LP	150,000 (37,825)	Liquid Propane

Special Order Available:

BTU sizes 40K, 60K and 80K (10,086; 15,129 and 20,173 kcal); Two-Stage Burners; Hot Surface Ignition, and CSA-Certified Models

### COMFORTER™ Tube Sets (Includes Tubes, Reflectors, Hangers, Couplers, Tube Vent Cap, Drip Line, Gas Hose, Electric Cord and Turbulator)

Item Number	Use with Burner Box Model Numbers	Length	Mounting Clearance to Ceiling	Typical Mounting Height	Shipping Weight
106401AG	HSAG 100	30-ft. (9.14-m) Tube Set	12 in. (305 mm)	10-15 ft. (3.05-4.57 m)	130 lb. (59 kg)
F106406AG	HSAG 125 or HSAG 100	40-ft. (12.19-m) Tube Set	12 in. (305 mm)	12-19 ft. (3.66-5.79 m)	150 lb. (68 kg)
F106407AG	HSAG 150	50-ft. (15.24-m) Tube Set	12 in. (305 mm)	12-19 ft. (3.66-5.79 m)	175 lb. (79.4 kg)

Special Order Available: Tube Sets in 10 ft., 20 ft. and 60 ft. (3.05, 6.10 and 18.29 m)

### COMFORTER™ Accessories (See additional accessories in JET™ & COMFORTER™ Series list below. Custom LP/NG gas hoses and water hoses available.)

#### COMFORTER™ Specifications (See additional specifications in JET™ & COMFORTER™ Series list below.)

Electrical – 120 volt-60 Hz; Starting Current – 5.0 amps; Running Current – 1.0 amps; Custom Order – 220 volt-50 Hz

Combustion Chamber / Heat Exchanger

First Tube – 4 in. (102 mm) aluminized steel tubing, 16 gauge (1.3 mm)

Remaining Tube – 4 in. (102 mm) hot rolled steel, 16 gauge (1.3 mm)

Flue Connection – 4 in. (102 mm) O.D.

**NOTICE: Always check local codes for permitted use. See owner's manual for proper installation and operation.**

## Accessories for both JET™ & COMFORTER™ Series

Item Number	Description
F106414	Converts All Units to U-Tube Configuration
F111756	Air Intake Kit Includes Mini-Vent Cap, Vertical Support Pipe, Flex Tube, Two 4 in. (102 mm) Worm Gear Clamps
11679	800,000 BTU Regulator; Top Mount; 1/2 in. x 3/4 in. FNPT (12.7 mm x 19.0 mm FNPT); Outlet Set Point 11 in. (279 mm) WC; Outdoor
11683	800,000 BTU Regulator; Top Mount; 3/4 in. x 3/4 in. FNPT (19.0 mm x 19.0 mm FNPT); Outlet Set Point 11 in. (279 mm) WC; Outdoor
11689	500,000 BTU Regulator; Back Mount; 1/2 in. x 1/2 in. FNPT (12.7 mm x 12.7 mm FNPT); Outlet Set Point 11 in. (279 mm) WC; Outdoor

## Specifications for both JET™ & COMFORTER™ Series

Gas Connection – 1/2 in. (12.7 mm) NPT

Burner – Direct spark ignition electronic safety circuitry

Gas Supply – Natural Gas Min 4.6 in. (117 mm) WC; Max 14 in. (356 mm) WC; LP Gas Min 11 in. (279 mm) WC; Max 14 in. (356 mm) WC

Warranty – Limited 2-year warranty on all tubes; Limited 1-year warranty on burner boxes and other components

**NOTICE: Always check local codes for permitted use. See owner's manual for proper installation and operation.**

\*The trademarks HEATSTAR AG, JET, JET25, JET20 and COMFORTER are not owned or licensed by CTB, Inc. and are the sole property of ENERCO Group Inc.



Let's grow together®

[www.choretime.com](http://www.choretime.com)

Chore-Time is a division of CTB, Inc.  
A Berkshire Hathaway Company



Find your authorized independent distributor at [choretime.com/distributor](http://choretime.com/distributor)

**Chore-Time**  
Milford, Indiana USA  
[info@choretime.com](mailto:info@choretime.com)

**Chore-Time Europe Sp. z o.o.**  
Strykowo, Poland  
[info@choretime.pl](mailto:info@choretime.pl)

**Chore-Time Europe B.V.**  
Panningen, Netherlands  
[info@choretime.nl](mailto:info@choretime.nl)

**Volito B.V.**  
Veenendaal, Netherlands  
[ctgcs@choretime.com](mailto:ctgcs@choretime.com)