

# ENDURA® Direct-Drive 57-Inch Fan



Let's grow together®


Chore-Time's 57-inch (145-cm) ENDURA® Direct-Drive Fan features a variable-speed, direct-drive motor for minimal maintenance and maximum efficiency.

## Low Maintenance

- ENDURA® Fans with new direct-drive motor eliminate many common maintenance needs.
- No belts and pulleys to replace.
- No bearings to grease.
- Durable design of the ENDURA® Fan itself offers low maintenance and long-lasting performance.

## Energy Efficient

- Direct-drive design offers a superior level of efficiency for energy-minded growers.
- Even greater savings can be achieved due to variable speed functionality.

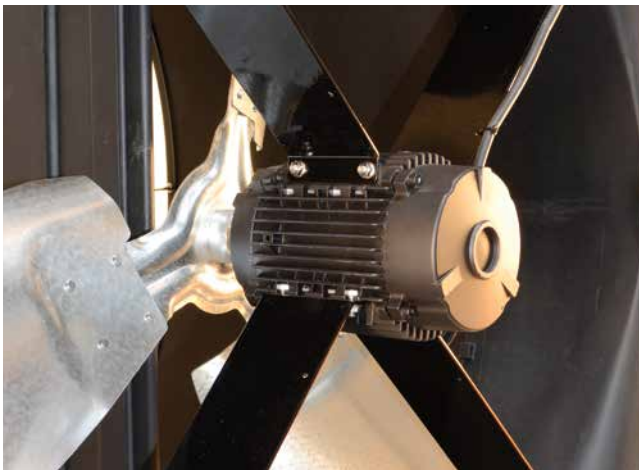

*With no belts, pulleys or bearings, the direct-drive motor eliminates many common maintenance needs.*



Count on Chore-Time for experience, reliability, performance and confidence.

**NEW!**



*Chore-Time's 57-inch ENDURA® Direct-Drive Fan with HYFLO® Shutters features a variable speed motor to help maximize energy efficiency.*

## Variable Speed

- Variable frequency drive allows fan to operate at different speeds.
- Fan speed is controlled automatically by the CHORE-TRONICS® 3 Controller in combination with a variable frequency drive.
- Exponential energy savings can be achieved by slowing fan speed whenever air flow requirements allow.

## Fan Performance

- Efficiently produces one of the highest air flow ratings in the industry.
- Provides very consistent air flow as the wind speed varies.
- All ENDURA® Fan components were designed by Chore-Time to maximize overall fan efficiency.


## Proven ENDURA® Fan Design

- New direct-drive fans use Chore-Time's industry-leading ENDURA® Fan design.
- Features HYFLO® Shutters, which do not suffer the typical 12-15% loss of efficiency and air speed typical of dirty louver-style shutters, so air speed is maintained to the end of the flock, when you need it most.
- Durable long glass fiber composite shroud and HYFLO® Shutter Doors contain 35% fiberglass for strength.
- Extensive durability testing under both extreme high and extreme low temperatures.
- Black HDPE (high-density polyethylene) cone aids in light control.

# ENDURA® Direct-Drive Fan Specifications

## Composite Shroud & Shutter Doors / HDPE Cone

Direct-drive ENDURA® Fans efficiently produce one of the highest air flow ratings in the industry. Use a CHORE-TRONICS® 3 Controller, in combination with a variable frequency drive (shown below right), to achieve even greater energy savings by slowing the fan whenever air flow requirements allow.

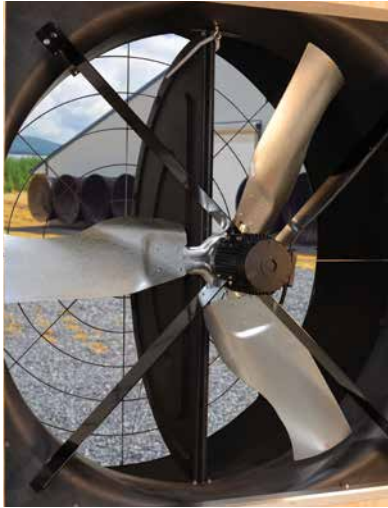

*HYFLO® Shutters improve fan performance by minimizing obstructions during operation.*

*NOTE: Inside grill has been removed for photography only.*



*Variable frequency drive*



STANDARD MOUNT		U.S. MEASURE				METRIC				Air Flow Ratio	Bess Lab Test No.	230V Power
Part No.	Hz	Static Pressure .10"		Static Pressure .15"		Static Pressure 25 Pa		Static Pressure 37.5 Pa				
		CFM	CFM/Watt	CFM	CFM/Watt	CMH	CMH/Watt	CMH	CMH/Watt			
56555-1	41.8	32,000	19.7	30,500	17.6	54,300	33.6	51,900	30.0	0.86	20084	60 Hz 1 Ph
	38.1	28,900	22.5	27,100	19.7	49,000	38.3	46,100	33.5			
	33.0	24,400	27.5	22,100	23.0	41,400	46.8	37,600	39.1			
	28.1	18,200	29.8	14,800	22.5	31,000	50.6	25,200	38.3			
	23.2	11,900	31.8	6,600	15.9	20,300	54.0	11,300	27.0			
56555-2	42.0	32,100	20.0	30,400	17.7	54,500	34.0	51,600	30.1	0.86	20085	60 Hz 3 Ph
	38.2	28,800	22.8	27,100	19.9	48,900	38.8	46,100	33.7			
	33.2	24,400	27.6	21,900	22.7	41,400	46.9	37,200	38.6			
	28.2	18,300	29.9	14,700	22.4	31,100	50.8	25,000	38.1			
	23.2	11,400	30.5	6,500	15.5	19,400	51.8	11,000	26.4			
56555-2	42.0	31,800	19.8	30,500	17.9	54,100	33.7	51,700	30.4	0.86	20086	50 Hz 3 Ph
	38.2	28,700	22.6	27,000	19.9	48,900	38.4	45,900	33.9			
	33.2	24,200	27.1	21,900	22.6	41,100	46.0	37,200	38.5			
	28.2	18,300	30.0	14,600	22.3	31,000	51.0	24,800	37.9			
	23.2	11,500	31.0	6,400	15.7	19,600	52.7	10,900	26.6			



Let's grow together®

[www.choretime.com](http://www.choretime.com)

Chore-Time is a division of CTB, Inc.  
A Berkshire Hathaway Company

Find your authorized independent distributor at [choretime.com/distributor](http://choretime.com/distributor)

**Chore-Time**  
Milford, Indiana USA  
[info@choretime.com](mailto:info@choretime.com)

**Chore-Time Europe Sp. z o.o.**  
Strykowo, Poland  
[info@choretime.pl](mailto:info@choretime.pl)

**Chore-Time Europe B.V.**  
Panningen, Netherlands  
[info@choretime.nl](mailto:info@choretime.nl)

**Volito B.V.**  
Veenendaal, Netherlands  
[ctgcs@choretime.com](mailto:ctgcs@choretime.com)