


**CHORE-TIME**

## Split (48401) Auger Connector Instruction

Auger Connector with Auger **before**  
Connector Bolt is tightened (note gap)

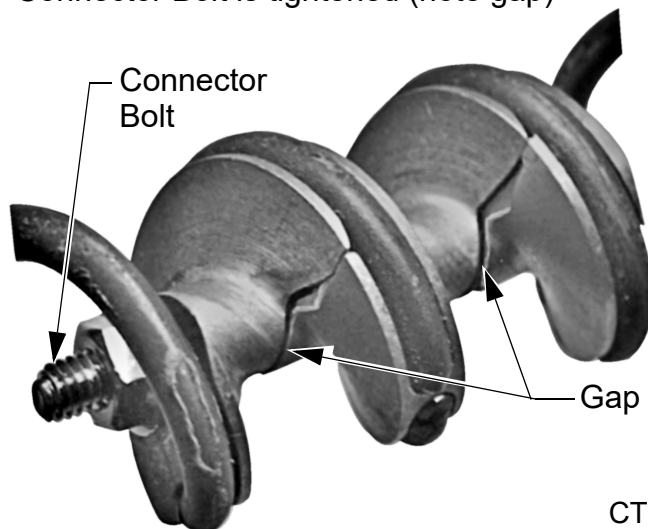

Auger Connector with Bolt tightened  
to a maximum of 250-300 in-lbs  
(21-25 ft-lbs)



CTB, Inc.

P.O. Box 2000 • Milford, Indiana 46542-2000 • U.S.A.

Phone (574) 658-4101 • Fax (877) 730-8826

E-Mail: [ctb@ctbinc.com](mailto:ctb@ctbinc.com) • Internet: <http://www.ctbinc.com>


September 2018

MC1798C

**CHORE-TIME**

## Split Auger Connector (48401) Instruction

Auger Connector with Auger **before**  
Connector Bolt is tightened (note gap)

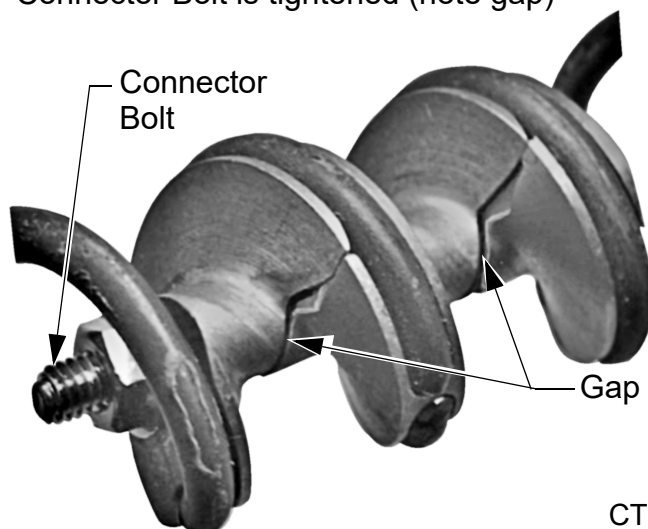

Auger Connector with Bolt tightened  
to a maximum of 250-300 in-lbs  
(21-25 ft-lbs)



CTB, Inc.

P.O. Box 2000 • Milford, Indiana 46542-2000 • U.S.A.

Phone (574) 658-4101 • Fax (877) 730-8826

E-Mail: [ctb@ctbinc.com](mailto:ctb@ctbinc.com) • Internet: <http://www.ctbinc.com>

September 2018

MC1798C