


23056 DROP ASSEMBLY



Using The 23877 Drop Mount Plate

INSTALLATION


1. Locate the hole in the auger tube which will serve as the outlet drop hole (the hole will point straight down as installed in the line). Mark the tube on the side--90° to the hole--as shown in Figure 1. The mark should be placed on the side of the tube toward the far end of the house.

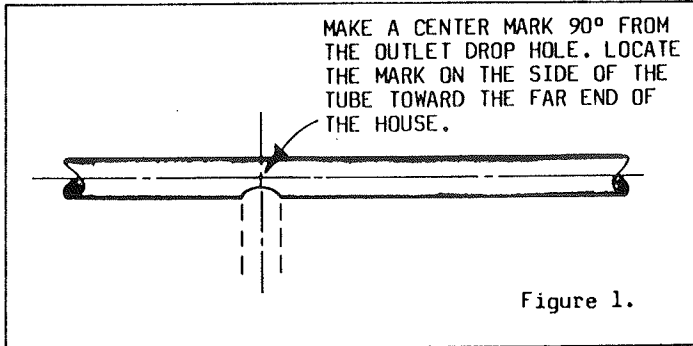

2. Center the 23877 Drop Mount Plate Assembly over the mark. Clamp the Drop Mount Plate on the tube so that the stud in the plate is horizontal. See Figures 2 and 3.

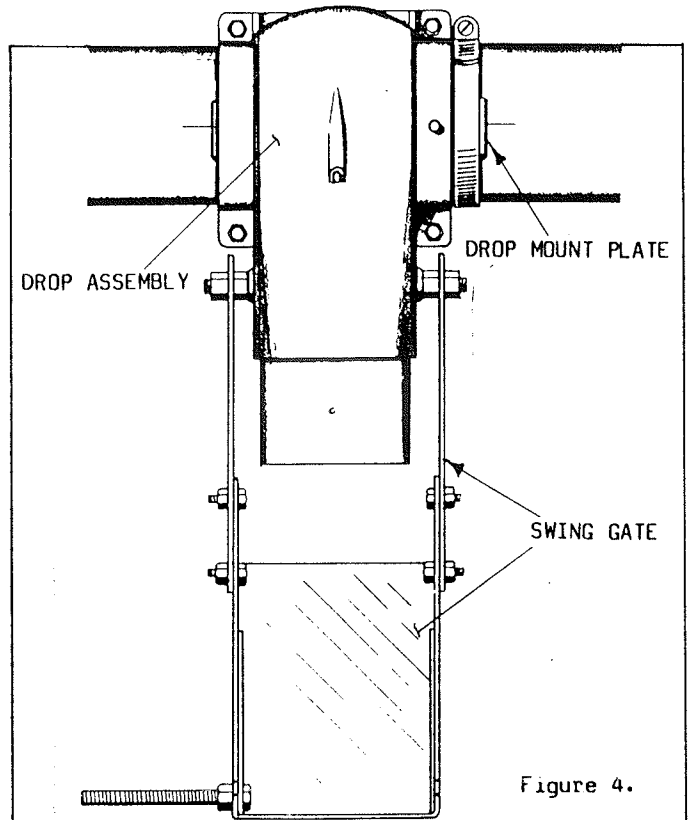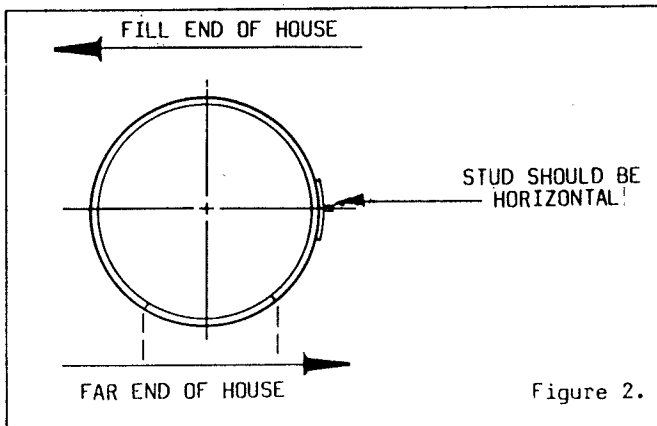

3. Remove the Swing Gate and Drop Tube and separate the two halves of the Drop Assembly. See Figure 4.
4. Place the two halves of the Drop Assembly over the auger tube. Make sure the drop halves point straight down. Tighten the two halves together using the hardware provided.
5. Install the Swing Gate and Drop Tube. See Figure 4. Adjust height as needed. Drop tube must not interfere with the fill cap kit on the hopper!

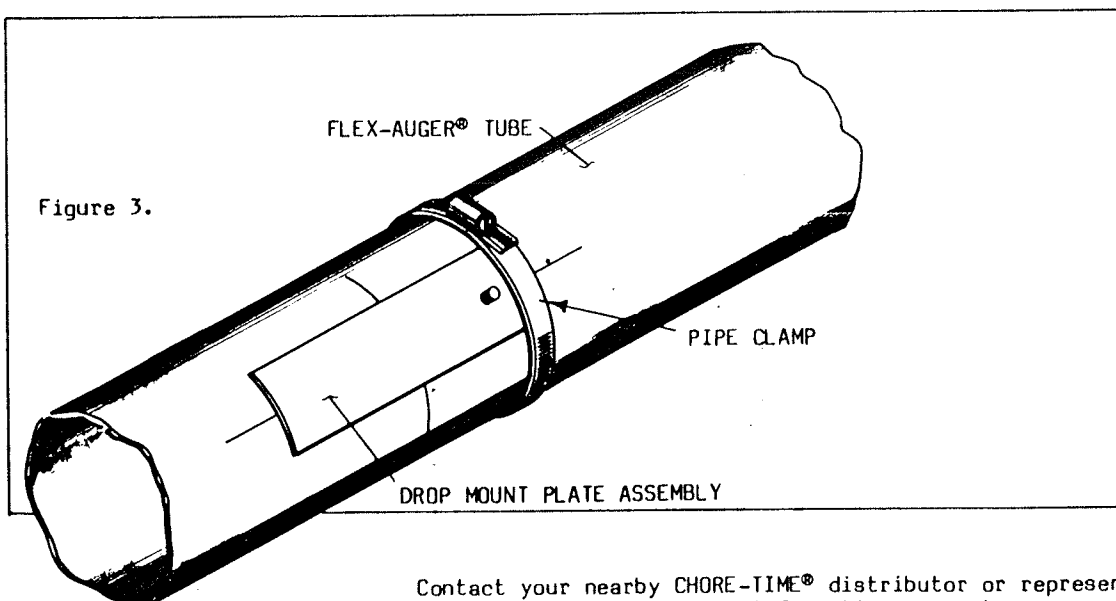

618A2-584.

Printed in U.S.A.

Contact your nearby CHORE-TIME® distributor or representative for additional information or parts.
 Chore-Time Equipment, Inc.; Milford, Indiana 46542; Decatur, Alabama 35601;
 Modesto, California 95356; Maldegem, Belgium.