

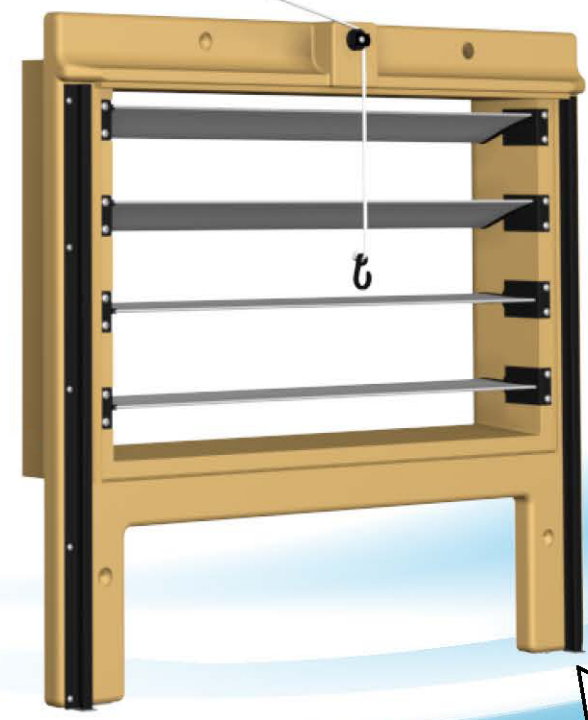
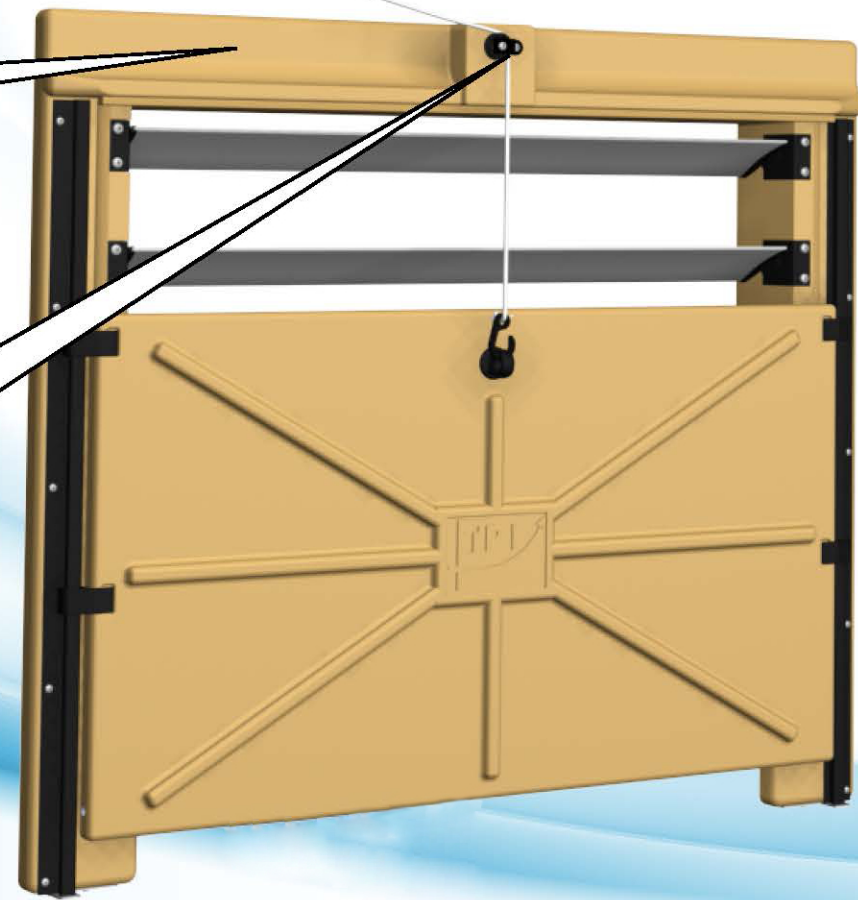
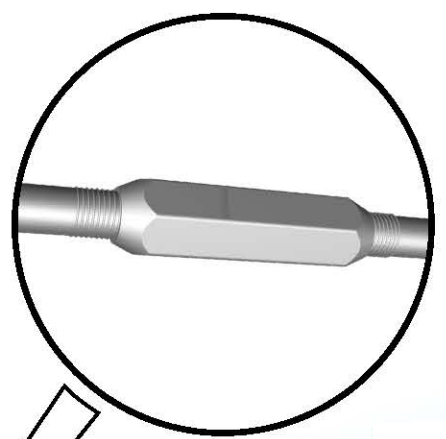
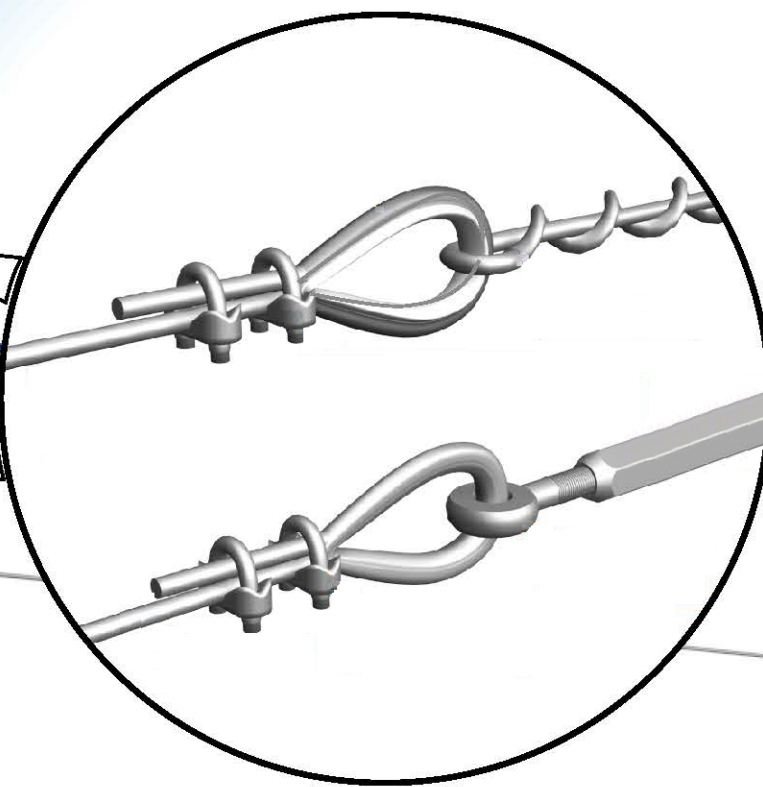


30-1/8" x 18-3/4"
765 x 475 mm

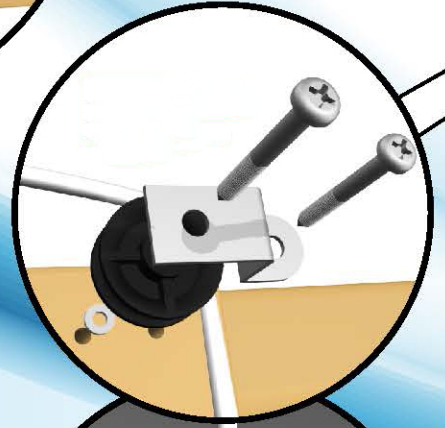

Chore-Time Group, A division of CTB, Inc.
PO Box 2000 Milford, Indiana 46542-2000 USA
Phone (574) 658-4101 Fax (877) 730-8825
Email: chovertime@chovertime.com Internet: www.chovertime.com

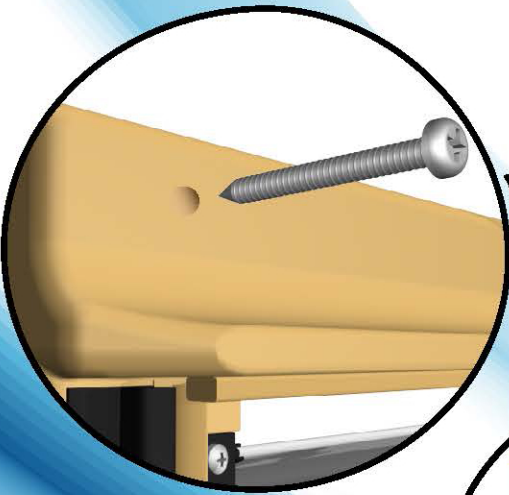


Both the housing and the movable plate of this type of inlet valve introduced in 2017 are manufactured of high-quality polyurethane. Q-lon seals are placed around the outside of the housing. Therefore, this inlet valve is perfectly suited to use at extremely low temperatures. The four specially formed louvers can be positioned independently. The polyurethane plate slides along a guide rail using specially developed gliders. This prevents them from sticking. The movable plate can be removed without having to adjust the position of the flap. This unique feature makes installation and cleaning easier. The omniflux has been developed to direct the airflow independently from the required capacity. This means that this inlet valve is perfectly suitable for use in houses where there are obstacles or in very wide houses.

CAPACITY

Capacity in CFM at a static pressure of inch H₂O:

Position	0.04	0.08	0.16
Horizontal	1883	2619	3767
30° in one direction	1324	1883	2648
30° in two directions	1265	1766	2530


SPECIFICATIONS

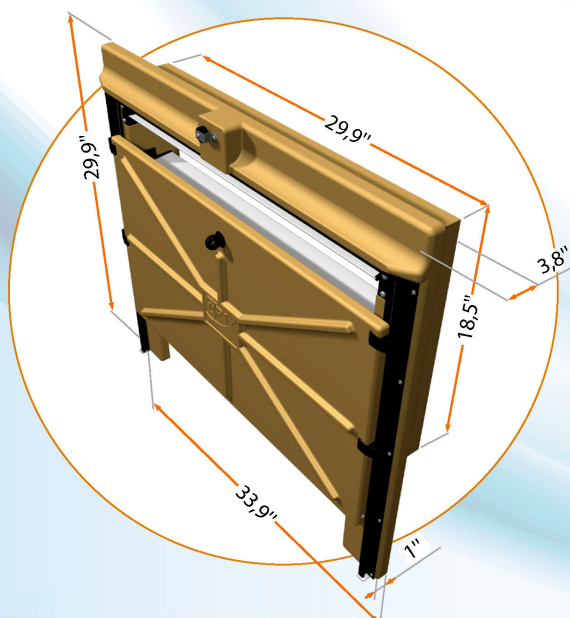

INFORMATION

Run	42 cm / 15.9 inch
Force	3 kg / 29.5 Newtons
Number / pallet (1.20 x 1.00 x 2.40 m)	22 (2 boxes)

AIR FLOW

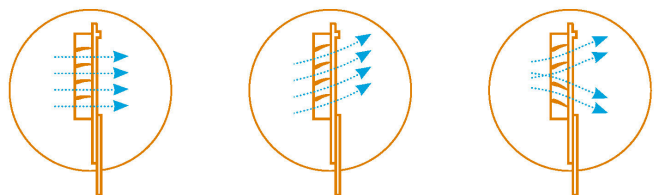

Chore-Time Group, A division of CTB, Inc.
PO Box 2000 Milford, Indiana 46542-2000 USA
Phone (574) 658-4101 Fax (877) 730-8825
Email: choretime@choretime.com Internet: www.choretime.com

MV2483A